


APSW 4-Ply, Wire-Reinforced, Mandrel-Wrapped, Silicone Suction Hose

Platinum-Cured; Smooth or Convuluted O.D.

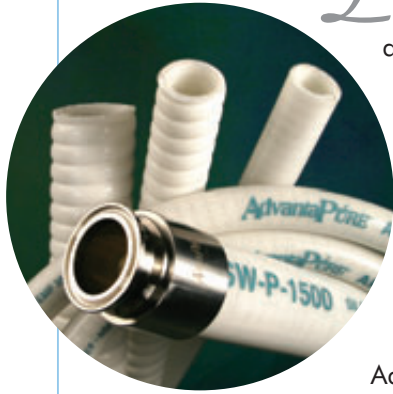

Low volatile grade, platinum-cured silicone hose for critical pharmaceutical, biopharm, cosmetic, and food applications comprises the liner of AdvantaSil APSW. The liner is slipped onto a mandrel and wrapped with polyester mesh fabric, 316 stainless steel reinforcing wire and additional silicone. It's cured into a homogeneous hose to enhance its pressure and vacuum capabilities. AdvantaSil APSW has undergone extensive physical, chemical and biological testing and meets USP Class VI, FDA CFR 177.2600, ISO 10993 and European Pharmacopoeia 3.1.9 standards.

AdvantaSil APSW is not intended for implantation and is not to be used for continuous steam applications.



SILICONE
www.advantapure.com

KEY FEATURES

- Available with either a smooth O.D. or, for an improved range of flexibility, convuluted
- Low volatile grade silicone suitable for pharmaceutical, biopharm, cosmetic, and food applications such as ultrapure water transfer, food processing, washdown stations, skid systems, and other suction and discharge uses
- Liner certified free of animal-derived ingredients
- Hardness value of 70 Shore A
- Rated for full vacuum
- Crush and kink resistant; durable and heavy-duty
- General temperature range: -100°F (-73.3°C) to 350°F (176.6°C)
- Sterilizable by autoclave, CIP and SIP processes
- Resists temperature extremes, chemical attack, ozone, radiation, moisture and environmental exposure
- Documented lot traceable with identification on bags
- Documented quality control
- Custom lengths and hose assemblies with an assortment of fittings available
- AdvantaSil APSW has a Master File with the U.S. Food and Drug Administration (#27582)
- Listed by the National Sanitation Foundation for food equipment materials (NSF-51)




Liner



Complete validation package available on request

AdvantaSil™ APSW 4-Ply, Wire-Reinforced, Mandrel-Wrapped, Silicone Suction Hose



SPECIFICATIONS

Product Number	I.D. (in.) (mm)	O.D. (in.) (mm) (reference)	Vacuum Rating (in./Hg.)	Working Pressure at 70°F (21.1°C) (PSI) (Bar)	Burst Pressure at 70°F (21.1°C) (PSI) (Bar)	Minimum Bend Radius (in.)	Weight per Foot / Meter (lb) (kg)					
APSW-P SMOOTH O.D.												
APSW-P-0500	.500	12.70	.910	23.11	>29	150	10.3	600	41.4	2.0	.281	.418
APSW-P-0750	.750	19.05	1.16	29.46	>29	150	10.3	600	41.4	2.5	.359	.534
APSW-P-1000	1.000	25.40	1.41	35.81	>29	150	10.3	600	41.4	3.5	.438	.652
APSW-P-1500	1.500	38.10	1.91	48.51	>29	150	10.3	600	41.4	4.0	.685	1.019
APSW-P-2000	2.000	50.80	2.41	61.21	>29	150	10.3	600	41.4	6.0	.875	1.302
APSW-P-2500	2.500	63.50	2.91	73.91	>29	125	8.6	500	34.5	11.0	1.050	1.562
APSW-P-3000	3.000	76.20	3.41	86.61	CF	100	6.9	400	27.6	13.0	1.230	1.830
APSW-P-4000	4.000	101.60	4.41	112.01	CF	100	6.9	400	27.6	CF	1.710	2.545
APSW-PC CONVOLUTED O.D.												
APSW-PC-0500	.500	12.70	.910	23.11	>29	150	10.3	600	41.4	2.0	.208	.309
APSW-PC-0750	.750	19.05	1.16	29.46	>29	150	10.3	600	41.4	2.5	.307	.457
APSW-PC-1000	1.000	25.40	1.41	35.81	>29	150	10.3	600	41.4	3.5	.390	.580
APSW-PC-1500	1.500	38.10	1.91	48.51	>29	150	10.3	600	41.4	4.0	.625	.930
APSW-PC-2000	2.000	50.80	2.41	61.21	>29	125	8.6	500	34.5	6.0	.775	1.153

Wall dimensions for all sizes and styles: .205"; 5.21mm
CF = Consult Factory

NOTE: When products are used as part of an assembly, the pressure ratings of fittings may be less than hose pressure ratings above. Please consult your sales representative.

SILICONE

Purity in Fluid Flow Systems®

Address: NewAge Industries AdvantaPure®
145 James Way
Southampton, PA 18966 U.S.A.

AdvantaPure®
NEWAGE INDUSTRIES



DISTRIBUTED BY:

Toll Free Phone: **888-755-4370**
Phone: **215-526-2151**
Toll Free Fax: **888-258-4293**
Fax: **215-526-2167**
Web Site: **www.advantapure.com**
E-mail: **sales@advantapure.com**

©2017 NewAge® Industries, Inc. Specifications are subject to change without notice. AdvantaPure products are produced by NewAge® Industries, Inc. AdvantaSil™, NewAge Industries AdvantaPure®, Purity in Fluid Flow Systems®, NewAge®, and the "N" logo are trademarks of NewAge® Industries, Inc.



ESOP Employee Owned
for Your Benefit

WARRANTY: NewAge Industries AdvantaPure products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries AdvantaPure products, item for item, which after examination by NewAge Industries AdvantaPure are deemed defective. NewAge Industries AdvantaPure specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.

NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term New-Age.