


STAINLESS STEEL ARMOR CASING



Armor casing, manufactured from durable stainless steel, provides a protective covering for hoses. Intended to encase rubber or stainless steel overbraided hose, Armor Casing prevents hoses from kinking while still allowing flexibility. It is used on hoses typically found in the food, beverage, dairy, chemical, and cosmetic industries as well as other process applications.





STAINLESS STEEL
www.advantapure.com

KEY FEATURES

- Protects rubber-covered or stainless steel overbraided hose of fluoropolymers and other interior rubber materials such as EPDM
- Guards against harsh environments and rough handling
- Durable, segmented construction allows flexibility as it prevents kinking
- Protects exterior hose surfaces from abrasion
- Crush-resistant — adds a layer of protection against compression damage
- Provides an added degree of safety in cases of interior hose failure
- Fits hoses ranging in size from 1/2" to 2" I.D.
- Works in conjunction with stainless steel crimp rings for secure attachment to hose assemblies
- Crimp rings offer a smooth, burr-free finish
- Use Armor Casing along the entire length of a hose or Armor Cuffs at the ends only to reduce stress and kink potential at fitting connections
- Ready-to-install hose assemblies complete with Armor Casing can often be fabricated in a few days

STAINLESS STEEL ARMOR CASING

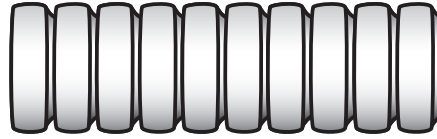

SPECIFICATIONS

Armor Casing Product #	Crimp Ring Product #	Description	Bend Radius (in.)	Bend Radius (mm)	Weight (lbs./ft.)
N/A	CR105	Crimp Ring fits 1/4" & 3/8" silicone jacketed, stainless steel overbraided PTFE (APFOSJ-W-0250, APFOSJ-W-0375)	N/A	N/A	N/A
75AC-087	CR125	fits 1/2" stainless steel overbraided PTFE (APFOS-W-0500, APFOS-WC-0500) & 1/2" silicone jacketed, stainless steel overbraided PTFE (APFOSJ-W-0500, APFOSJ-WC-0500)	4	101.6	.50
75AC-112	CR150	fits 3/4" stainless steel overbraided PTFE (APFOS-W-0750, APFOS-WC-0750), 1/2" rubber-covered FEP (APFRC-W-FLX-0500), & 3/4" silicone jacketed, stainless steel overbraided PTFE (APFOSJ-W-0750, APFOSJ-WC-0750)	5	127.0	.50
75AC-137	CR175	fits 1" stainless steel overbraided PTFE (APFOS-W-1000, APFOS-WC-1000), 3/4" rubber-covered FEP (APFRC-W-FLX-0750), 3/4" reinforced EPDM (APEWF-W-0750), & 1" silicone jacketed, stainless steel overbraided PTFE (APFOSJ-W-1000, APFOSJ-WC-1000)	6	152.4	.55
75AC-175	CR225	fits 1" rubber-covered FEP (APFRC-W-FLX-1000), 1" reinforced EPDM (APEWF-W-1000)	7	177.8	.70
75AC-200	CR250	fits 1-1/2" stainless steel overbraided PTFE (APFOS-W-1500, APFOS-WC-1500) & 1-1/2" silicone jacketed, stainless steel overbraided PTFE (APFOSJ-WC-1500)	8	203.2	.80
75AC-237	CR300	fits 1-1/2" rubber-covered FEP (APFRC-W-FLX-1500) & 1-1/2" reinforced EPDM (APEWF-W-1500)	9.5	241.3	.95
75AC-250	CR300	fits 2" stainless steel overbraided PTFE (APFOS-W-2000, APFOS-WC-2000)	10	254.0	1.00
75AC-287	CR350	fits 2" rubber-covered FEP (APFRC-W-FLX-2000) & 2" reinforced food hose (APEWF-W-2000)	11	279.4	1.25

STAINLESS STEEL

Purity in Fluid Flow Systems®



Made in U.S.A.

Address: NewAge Industries AdvantaPure®
145 James Way
Southampton, PA 18966 U.S.A.



DISTRIBUTED BY:

Toll Free Phone: **888-755-4370**
Phone: **215-526-2151**
Toll Free Fax: **888-258-4293**
Fax: **215-526-2167**
Web Site: **www.advantapure.com**
E-mail: **sales@advantapure.com**

©2011 NewAge® Industries, Inc. Specifications are subject to change without notice. AdvantaPure® products are produced by NewAge® Industries, Inc. Purity in Fluid Flow Systems®, NewAge Industries AdvantaPure®, NewAge®, and the "N" logo are trademarks of NewAge® Industries, Inc.



ESOP Employee Owned
for Your Benefit

WARRANTY: NewAge Industries AdvantaPure products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries AdvantaPure products, item for item, which after examination by NewAge Industries AdvantaPure are deemed defective. NewAge Industries AdvantaPure specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.

NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term NewAge.