



APFOS STAINLESS STEEL OVERBRAIDED PTFE HOSE

WHITE PTFE CORE; SMOOTH OR CONVOLUTED I.D.

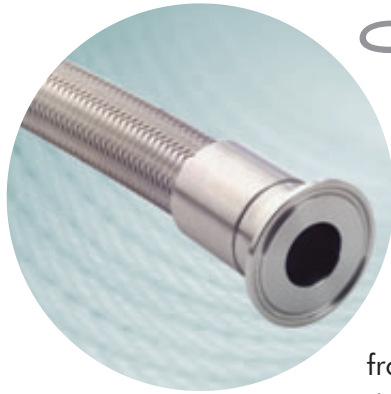

Stainless steel overbraided PTFE hose is constructed of virgin material with a 300 series stainless steel wire braid reinforcement jacket. The fluoropolymer core is inert and offers long flexural life, low permeability, non-flammability, and the lowest coefficient of friction of any solid material. The stainless steel overbraid permits higher pressure uses, reduces the possibility of kinking, and generally protects the core. **Optional silicone jacketing** offers protection from high temperatures during handling and keeps the outer surface clean and smooth.



KEY FEATURES

- True Bore PTFE Smooth Core offers maximum flow; Convolute Core offers excellent flow with enhanced flexibility
- Stock sizes for True Bore Smooth Core: 1/4 in. through 1-1/2 in.; Convolute Core: 1/2 in. through 3 in.
- Hose liner meets FDA 21 CFR 177.1550, ISO 10993 Sections 5, 6, 10 and 11 and is made from USP Class VI compliant material
- General temperature range: -100°F (-73.3°C) to 450°F (232.2°C)
- Excellent chemical compatibility
- Resists moisture
- Easily cleaned or sterilized by autoclave, steam, or detergent
- **Optional silicone jacketing** makes stainless steel reinforced hose easier to handle by offering heat protection
- **Silicone jacketing** also provides a smooth outer surface to eliminate particle entrapment for sanitary conditions
- Full line of crimp fittings and custom assemblies offered
- Custom lengths, sizes, other overbraiding materials, special cleaning, and/or packaging is available
- Add stainless steel armor casing or cuffs for an extra layer of protection from crushing, kinking, harsh environments, and abrasion while still allowing flexibility
- Laser-etched stainless steel collars for hose identification available

FLUOROPOLYMER

www.advantapure.com

AdvantaPURE[®]
NEWAGE INDUSTRIES

PURITY IN FLUID FLOW SYSTEMS[®]

APFOS STAINLESS STEEL OVERBRAIDED PTFE HOSE


WHITE PTFE CORE; SMOOTH OR CONVOLUTED I.D.



SPECIFICATIONS

Product Number	I.D.		Nominal O.D.		Working Pressure at 72°F (22°C)		Burst Pressure at 72°F (22°C)		Minimum Bend Radius		Weight per Foot (lbs.)
	(in.)	(mm)	(in.)	(mm)	(PSI)	(Bar)	(PSI)	(Bar)	(in.)	(mm)	

APFOS-W WHITE PTFE CORE, SMOOTH I.D., 304 STAINLESS STEEL REINFORCEMENT




APFOS-W-0250*	.250	6.35	.370	9.4	3,000	207.0	12,000	828.0	3.0	76.2	.08
APFOS-W-0375*	.375	9.53	.510	13.0	2,000	138.0	8,000	552.0	5.0	127.0	.11
APFOS-W-0500*	.500	12.70	.630	16.0	1,750	120.7	7,000	483.0	6.5	165.1	.16
APFOS-W-0750*	.750	19.05	.880	22.4	1,000	69.0	4,000	276.0	8.5	215.9	.20
APFOS-W-1000*	1.000	25.40	1.130	28.7	1,000	69.0	4,000	276.0	12.0	304.8	.33
APFOS-W-1500DB* [^]	1.500	38.10	1.730	43.9	900	62.1	3,600	248.4	18.0	381.0	.79

*Limited stock availability – lead times and minimums may apply; call for details.

[^]Double Braided

Product Number	Nominal I.D.		Nominal O.D.		Working Pressure at 72°F (22°C)		Burst Pressure at 72°F (22°C)		Minimum Bend Radius		Weight per Foot (lbs.)
	(in.)	(mm)	(in.)	(mm)	(PSI)	(Bar)	(PSI)	(Bar)	(in.)	(mm)	

APFOS-WC WHITE PTFE CORE, CONVOLUTED I.D., 316 STAINLESS STEEL REINFORCEMENT



APFOS-WC-0500*	.500	12.70	.720	18.3	1,500	103.5	6,000	414.0	1.50	38.1	.16
APFOS-WC-0750*	.750	19.05	1.020	25.9	1,200	82.8	4,800	331.2	2.00	50.8	.27
APFOS-WC-1000*	1	25.40	1.310	33.3	1,000	68.9	4,000	276.0	2.50	63.5	.37
APFOS-WC-1500*	1.500	38.10	1.930	49.0	650	44.8	2,600	179.4	3.75	95.2	.54
APFOS-WC-2000*	2	50.80	2.420	61.5	450	31.0	1,800	124.2	4.75	120.6	.90
APFOS-WC-3000HW* [†]	3	76.20	3.800	96.5	175	12.0	700	48.3	14.00	355.6	1.82

*Limited stock availability – lead times and minimums may apply; call for details.


[†]Heavy Wall

FLUOROPOLYMER

NOTE: When products are used as part of an assembly, the pressure ratings of fittings may be less than hose pressure ratings above. Please consult your sales representative.

Product Number	I.D.		Nominal O.D.		Working Pressure at 72°F (22°C)		Burst Pressure at 72°F (22°C)		Minimum Bend Radius	
	(in.)	(mm)	(in.)	(mm)	(PSI)	(Bar)	(PSI)	(Bar)	(in.)	(mm)

APFOSJ-W
SILICONE JACKETED, WHITE PTFE CORE,
SMOOTH I.D., 304 STAINLESS STEEL
REINFORCEMENT



APFOSJ-W-0250*	.250	6.35	.540	13.72	2,530	174.4	10,150	699.8	3.0	75.0
APFOSJ-W-0375*	.375	9.53	.674	17.12	1,950	134.4	7,830	539.8	5.0	127.0
APFOSJ-W-0500*	.500	12.70	.804	20.42	1,740	119.9	6,960	479.8	6.0	152.0
APFOSJ-W-0750*	.750	19.05	1.060	26.92	1,300	89.6	5,220	359.9	8.0	203.0
APFOSJ-W-1000*	1.000	25.40	1.341	34.06	940	64.8	3,770	259.9	12.0	304.8


*Limited stock availability – lead times and minimums may apply; call for details.

Tolerances: ± 1% on bulk hose lengths

BLACK CONDUCTIVE core available by special request.

Product Number	Nominal I.D.		Nominal O.D.		Working Pressure at 72°F (22°C)		Burst Pressure at 72°F (22°C)		Minimum Bend Radius	
	(in.)	(mm)	(in.)	(mm)	(PSI)	(Bar)	(PSI)	(Bar)	(in.)	(mm)

APFOSJ-WC
SILICONE JACKETED, WHITE PTFE CORE,
CONVOLUTED I.D., 316 STAINLESS STEEL
REINFORCEMENT



APFOSJ-WC-0500*	.500	12.70	.930	23.62	1,600	110.3	6,380	439.8	2.0	50.8
APFOSJ-WC-0750*	.750	19.05	1.225	31.12	1,000	68.9	4,060	279.9	3.0	76.2
APFOSJ-WC-1000*	1	25.40	1.485	37.72	725	49.9	2,900	199.9	4.0	101.6
APFOSJ-WC-1500*	1.500	38.10	2.036	51.71	600	41.3	2,320	159.9	6.0	152.4

*Limited stock availability – lead times and minimums may apply; call for details.

Tolerances: ± 1% on bulk hose lengths

BLACK CONDUCTIVE core available by special request.

NOTE: When products are used as part of an assembly, the pressure ratings of fittings may be less than hose pressure ratings above. Please consult your sales representative.



MOLDED SINGLE-USE MANIFOLD ASSEMBLIES

AdvantaPure specializes in the design and manufacture of molded Single-Use manifold assemblies for sampling and storage applications. These assemblies are available in platinum-cured silicone or AdvantaFlex® biopharmaceutical grade TPE.


Learn more at www.advantapure.com/single-use-molded-manifolds.htm

APST UNREINFORCED SILICONE TUBING

Low-volatile grade, platinum-cured silicone tubing is clean-room produced for critical pharmaceutical, biomedical, cosmetic, and food applications. APST has undergone extensive physical, chemical, and biological testing and meets USP Class VI, FDA, ISO, and EP standards.



Learn more at www.advantapure.com/apst-silicone-tubing.htm



AdvantaFlex® BioPharmaceutical Grade Tubing



AdvantaFlex addresses the need for a flexible, sterilizable, moldable, weldable and heat sealable biopharmaceutical tubing without silicone oils. AdvantaFlex maintains its physical properties following sterilization processes, remains translucent for visible product flow and does not become gummy. The tubing resists kinking and is an excellent component for Single-Use systems.

Learn more at www.advantapure.com/advantaflex.htm

Purity in Fluid Flow Systems®



Made in U.S.A.

Address: NewAge Industries AdvantaPure®
145 James Way
Southampton, PA 18966 U.S.A.



Toll Free Phone: **888-755-4370**
Phone: **215-526-2151**
Toll Free Fax: **888-258-4293**
Fax: **215-526-2167**
Web Site: **www.advantapure.com**
E-mail: **sales@advantapure.com**

DISTRIBUTED BY:



©2020 NewAge® Industries, Inc. Specifications are subject to change without notice. AdvantaPure products are produced by NewAge® Industries, Inc. AdvantaFlex®, Purity in Fluid Flow Systems®, NewAge Industries AdvantaPure®, NewAge®, and the "N" logo are trademarks of NewAge® Industries, Inc.



WARRANTY: NewAge Industries AdvantaPure products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries AdvantaPure products, item for item, which after examination by NewAge Industries AdvantaPure are deemed defective. NewAge Industries AdvantaPure specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.
NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term NewAge.