

APLT Ultra Low Temperature Silicone Tubing

Platinum Cured



dvantaSil Ultra Low Temperature silicone tubing is a unique fluid flow product designed for applications where the tubing material is exposed to extremely low temperatures. AdvantaSil Ultra Low Temp remains flexible and crush resistant at -112°C — no cracking or loss of integrity. It's the first tubing of its kind and the optimal choice for applications related to bulk drug storage and transport.

AdvantaSil Ultra Low Temp has undergone extensive physical, chemical and biological testing and meets USP Class VI, FDA CFR 177.2600 and ISO 10993 standards. Full BPOG standardized extractables test protocol has been performed by a fully-accredited, third-party test lab.

Key Features

- Remains flexible and durable at temperatures as low as -112°C
- Allows for optimal freezer utilization since no clam shell is needed to protect the tubing
- Resists compression set and cracking at low temperatures
- Engineered for Single-Use applications
- Glass transition (Tg) temperature: -112°C
- Sterilizable by autoclave or gamma irradiation
- All assembly and final packaging is performed in an ISO Class 7 clean room
- Particulate testing per USP 788 is performed quarterly
- Available as molded manifold tubing assemblies, BioClosure[®] container closures with tubing, or as part of a bag assembly
- General temperature range: -112°C to 175°C (-169.6°F to 347°F)
- Certified free of animal-derived ingredients
- Documented lot traceable with identification on packaging
- Documented quality control per ISO 9001:2015
- Included in our Rx-360 Joint Audit Program for Single-Use Systems

Complete validation package available on request

Full BPOG standardized extractables test results available on request



www.advantapure.com



Available as molded BioClosure® container closures


AdvantaSil[°] APLT Ultra Low Temperature Silicone Tubing



SPECIFICATIONS

Product Number	I.D. (in.) (mm.)		Wall (in.) (mm.)		O.D. (in.) (mm.)		Standard Available Length (ft.)
Tulliber	(111.)	(11111.)	(111.)	(11111.)	(111.)	(11111.)	Lengen (ne.)
APLT-0125-0250	.125	3.18	.063	1.59	.250	6.35	50
APLT-0250-0375	.250	6.35	.063	1.59	.375	9.52	50
APLT-0250-0500	.250	6.35	.125	3.18	.500	12.70	50
APLT-0375-0625	.375	9.52	.125	3.18	.625	15.88	50
APLT-0500-0750	.500	12.70	.125	3.18	.750	19.05	50

Sold by standard coil length of 50 ft. only. Add length suffix code "L" to product number when ordering. Example: 50 ft. of .125 in. I.D. x .250 in. O.D. tubing is product number APLT-0125-0250L. Coils are supplied double bagged in heat-sealed polybags and bulk packed. Contact your AdvantaPure Sales Representative for other packaging options.

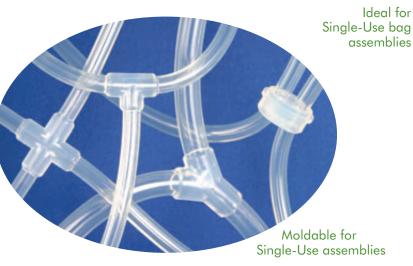





Address:

NewAge Industries AdvantaPure® 145 James Way Southampton, PA 18966 U.S.A.

Toll Free Phone: Phone: Toll Free Fax: Fax: Web Site: E-mail:

888-755-4370 215-526-2151 888-258-4293 215-526-2167 www.advantapure.com sales@advantapure.com





DISTRIBUTED BY:





WARRANTY: NewAge Industries AdvantaPure products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries AdvantaPure products, item for item, which after examination by NewAge Industries AdvantaPure are deemed defective. NewAge Industries AdvantaPure product so her provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarante, recommendation, or warranty for any application. NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term New-Age.